

SD-800-SL-E

HOIST CONTROLLER



HOIST CONTROLLER

SD-800-SL-E




SPX19 Direct Hoist Control

The SD-800-SL-E is an 8-channel control system designed for direct control chain hoists. It features two 19-pin connectors for easy cable management. Each output provides 4 channels, the multi-pin connector can be used at the multi-cable end. This control also has a socket to connect an RJ45 hand control. This box has the capacity to control simultaneously 8 hoists of 1000 kg at full load (8000kg).


Its avant-garde design, now allows interconnection (serial connection) between several controllers (a maximum of 4).

The SD-800-SL-E is offered with a standard automatic phase reversal. When the main power source is connected, the system is able to recognize the position of each controller and automatically assign its rank with the pendant, regardless of the configuration.

It can be used with an SD-100 as the main power distribution system and is capable of powering up to 6 units.

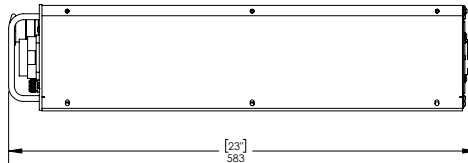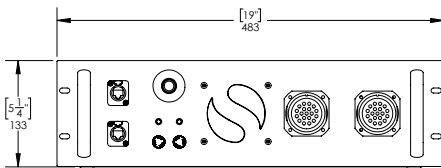

The Standard configuration comes with:

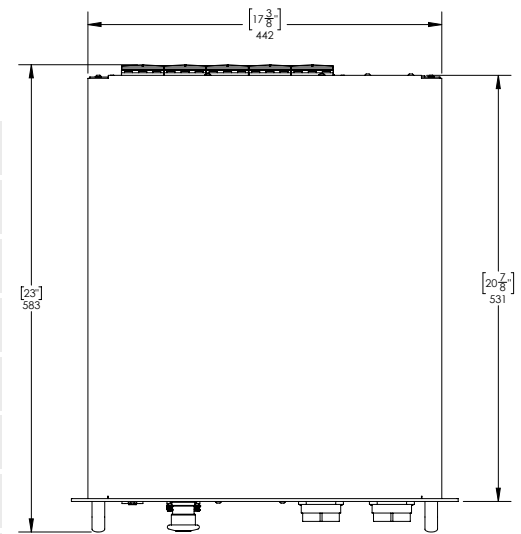

DIMENSIONS ARE IN INCHES

FEATURES

Front Panel:

- Built-in emergency switch with RJ45 as standard
- Pendant input connector, RJ45
- Power output connector 2x Socapex 19 pins (SPX19)
- Safety monitor: 4 status lights

Rear Panel:

- Power connector, 120/208V 3Ph, TL4-50-A-CS8375
- **Circuit breaker:** 4 for chain hoist
- Automatic reversal of series
- 3RU rack mount enclosure
- **Weight:** 45 Lbs

Certified

