

SD-800/SL-DC-2T

HOIST CONTROLLER



HOIST CONTROLLER

SD-800/SL-DC-2T

DIRECT CONTROL SOCAPEX 19-Pin

The SD-800/SL-2T is an 8x channel Hoist Controller for Direct Control chain hoists. It features Two 19-Pin connectors that make efficient cable management possible. Each output has 4 channels therefore the break-out can be used at the end of the multi-cable. This controller also has two hot-pockets for pickle hook-up. This SD-800/sl-dc-2T has the capacity to control 8x 2000kg hoist full load at the same time.

The SD-800/SL-2T comes with Automatic Phase Reverse (APR) as a standard feature. When the main supply is connected, there is no need to worry about switching over to the proper lifting direction. This controller can be used with a SD-100-2T as a main power distribution capable of driving up to 6x SD-800/ SL-2T units.



The Standard configuration comes with:

FEATURES

On Front Panel:


- Integrated E-Stop Button with Daisy Chain XLR-4 Device
- Pendant Input Connector, Veam 25-Pin (Tajimi 21-Pin as an Option)
- Power Output Connector, 2x Socapex 19-Pin

On Back Panel:

- Power Input Connector, 120/208V 3Ph, CEE-Form 60A - P260509-B
- Circuit Breaker: 4 for Chain Hoist, 1 for Hot Pocket

Note: Connector for Direct Pickle is on the Break-Out, TL4-30A - HBL-2723

- Automatic Phase Reverse as a Standard Feature (APR)
- 3RU Rack Mount Enclosure
- **Weight:** 45 Lbs

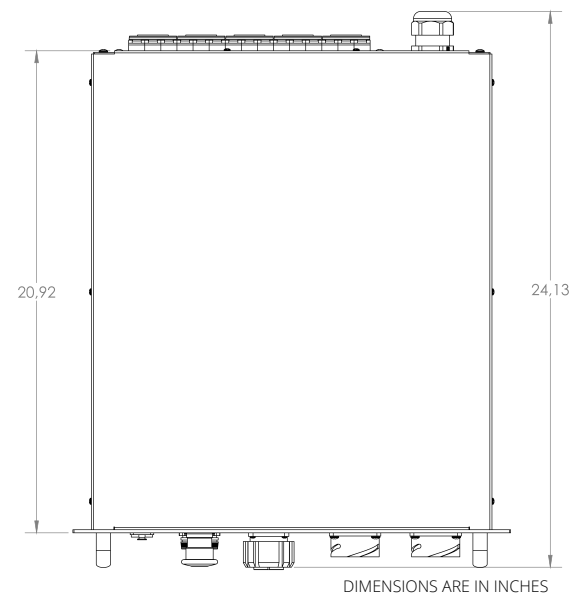

Certified

